
ATTENTION

Ensure the use of new bolts

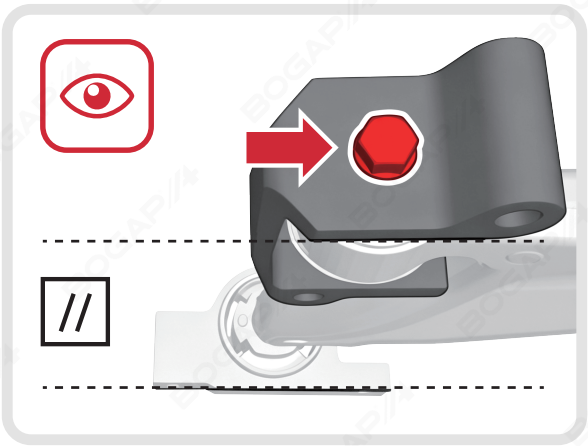

Torque: Control arm bushing bracket, installed to lower front control arm.

Step 1: 140 Nm **Step 2:** Tighten 90°

This bolt has been tightened to the standard torque; please do not loosen it during the assemble process.

If disassembly is required, tighten the bolt to the torque specified above.

BOGAP®

Driven By Premium Quality